

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number
WO 2005/002157 A1

(51) International Patent Classification⁷: **H04L 12/56**,
12/28, 1/18, H04Q 7/22, H04L 29/08

(21) International Application Number:
PCT/US2004/018264

(22) International Filing Date: 9 June 2004 (09.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/602,393 23 June 2003 (23.06.2003) US

(71) Applicant (for all designated States except US): **INTEL CORPORATION** [US/US]; (a Delaware Corporation), 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventor: **STEPHENS, Adrian**; 64 Lamb's Lane, Cottenham, Cambridge CB4 8TA (GB).

(74) Agent: **VINCENT, Lester, J.**; Blakely, Sokoloff, Taylor & Zafman, 12400 Wilshire Boulevard, 7th Floor, Los Angeles, CA 90025 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ADAPTIVE USE OF A TRANSMIT OPPORTUNITY

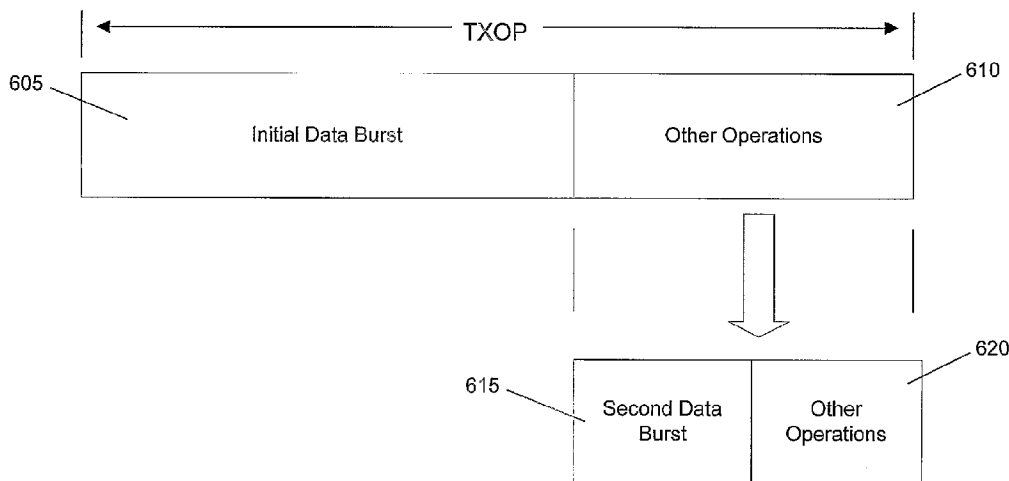

(57) Abstract: Various embodiments are described to adaptively use a transmit opportunity in order to use the transmit opportunity effectively. According to one embodiment, a transmit opportunity has a first portion for an initial data burst and a second portion for retry transmissions. The duration of each portion is based upon the estimated number of retry transmissions necessary for a certain initial.

ADAPTIVE USE OF A TRANSMIT OPPORTUNITY

BACKGROUND INFORMATION

5

[0001] In communication systems there are a number of limited resources, such as processing power, memory, bandwidth, etc. A station in a wireless system will often receive one or more opportunities to access a channel or transmit data over a channel. These opportunities to access a channel are also
10 valuable resources, and should be used appropriately. Systems should make the best possible use of each channel access. A technique is desirable to effectively use available transmit opportunities.

BRIEF DESCRIPTION OF THE DRAWINGS

15

[0002] FIG. 1 is a diagram illustrating an example of a wireless communication system in accordance with an embodiment of the invention.

[0003] FIG. 2 is a flow chart illustrating operation of a system according to an example embodiment.

20 **[0004]** FIG. 3 is a flow chart illustrating operation of a system according to another example embodiment.

[0005] FIG. 4 is a diagram illustrating several examples of how a channel condition may be detected or measured according to an embodiment.

[0006] FIG. 5 is a diagram illustrating examples of other operations a
25 system may perform according to an embodiment.

[0007] FIG. 6 is a diagram illustrating allocation of time for a TXOP according to an example embodiment.

[0008] FIG. 7 is a diagram illustrating operation of a system according to another embodiment.

5 [0009] FIG. 8 is a diagram illustrating a Binomial distribution according to an example embodiment.

[0010] FIG. 9 is a cumulative distribution function (CDF) based upon the Binomial distribution of FIG. 8.

[0011] FIG. 10 is a diagram illustrating an expected maximum number of
10 retries for a range of data burst sizes (N) and a range of probabilities of packet failure according to an example embodiment.

[0012] FIG. 11 is a flow chart illustrating operation of a system according to yet another example embodiment.

15 DETAILED DESCRIPTION

[0013] In the following detailed description, numerous specific details are set forth in order to provide a thorough understanding of the embodiments of the invention. It will be understood by those skilled in the art, however, that
embodiments of the invention may be practiced without these specific details. In
20 other instances, well-known methods, procedures and techniques have not been described in detail so as not to obscure the foregoing embodiments.

[0014] Some portions of the detailed description that follows are presented in terms of algorithms and symbolic representations of operations on data bits or binary digital signals within a computer memory. These algorithmic descriptions
25 and representations may be the techniques used by those skilled in the data

processing arts to convey the substance of their work to others skilled in the art.

[0015] An algorithm is here, and generally, considered to be a self-consistent sequence of acts or operations leading to a desired result. These include physical manipulations of physical quantities. Usually, though not
5 necessarily, these quantities take the form of electrical or magnetic signals capable of being stored, transferred, combined, compared, and otherwise manipulated. It has proven convenient at times, principally for reasons of common usage, to refer to these signals as bits, values, elements, symbols, characters, terms, numbers or the like. It should be understood, however, that all
10 of these and similar terms are to be associated with the appropriate physical quantities and are merely convenient labels applied to these quantities.

[0016] Unless specifically stated otherwise, as apparent from the following discussions, it is appreciated that throughout the specification discussions utilizing terms such as processing, computing, calculating, determining, or the like, refer to
15 the action or processes of a computer or computing system, or similar electronic computing device, that manipulate or transform data represented as physical, such as electronic, quantities within the registers or memories of the computing system into other data similarly represented as physical quantities within the memories, registers or other such information storage, transmission or display
20 devices of the computing system.

[0017] Embodiments of the present invention may include apparatuses for performing the operations herein. This apparatus may be specially constructed for the desired purposes, or it may comprise a general purpose computing device selectively activated or reconfigured by a program stored in the device. Such a
25 program may be stored on a storage medium, such as, but is not limited to, any

type of disk including floppy disks, optical disks, CD-ROMs, magnetic-optical disks, read-only memories (ROMs), random access memories (RAMs), electrically programmable read-only memories (EPROMs), electrically erasable and programmable read only memories (EEPROMs), flash memory, magnetic or optical cards, or any other type of media suitable for storing electronic instructions, and capable of being coupled to a system bus for a computing device.

[0018] The processes and displays presented herein are not inherently related to any particular computing device or other apparatus. Various general purpose systems may be used with programs in accordance with the teachings herein, or it may prove convenient to construct a more specialized apparatus to perform the desired method. The desired structure for a variety of these systems will appear from the description below. In addition, embodiments of the present invention are not described with reference to any particular programming language. It will be appreciated that a variety of programming languages may be used to implement the teachings of the invention as described herein.

[0019] In the following description and claims, the terms coupled and connected, along with their derivatives, may be used. In particular embodiments, connected may be used to indicate that two or more elements are in direct physical or electrical contact with each other. Coupled may mean that two or more elements are in direct physical or electrical contact. However, coupled may also mean that two or more elements may not be in direct contact with each other, but yet may still cooperate or interact with each other.

[0020] It is worthy to note that any reference in the specification to “one embodiment” or “an embodiment” means in this context that a particular feature, structure, or characteristic described in connection with the embodiment may be

included in at least one embodiment of the invention. The appearances of the phrase "in one embodiment" or "an embodiment" in various places in the specification do not necessarily refer to the same embodiment, but may be referring to different embodiments.

5 **[0021]** It should be understood that embodiments of the present invention may be used in a variety of applications. Although the present invention is not limited in this respect, the circuits disclosed herein may be used in many apparatuses such as in the transmitters and receivers of a radio system. Radio systems intended to be included within the scope of the present invention include,
10 by way of example only, wireless local area networks (WLAN) devices and wireless wide area network (WWAN) devices including wireless network interface devices and network interface cards (NICs), base stations, access points (APs), gateways, bridges, hubs, cellular radiotelephone communication systems, satellite communication systems, two-way radio communication systems, Time Division
15 Multiple Access (TDMA) systems, and the like, although the scope of the invention is not limited in this respect.

[0022] As used herein, the term packet may include a unit of data that may be routed or transmitted between nodes or stations or across a network. As used herein, the term packet may include frames, protocol data units or other units of
20 data. A packet may include a group of bits, which may include one or more address fields, control fields and data, for example.

[0023] Referring to the Figures in which like numerals indicate like elements, FIG. 1 is a diagram illustrating an example of a wireless communication system in accordance with one embodiment of the invention. In the
25 communications system 100 shown in FIG. 1, a user wireless system 116 may

include a wireless transceiver 410 coupled to an antenna 117 and to a processor 112. Processor 112 in one embodiment may comprise a single processor, or alternatively may comprise a baseband processor and an applications processor, although the scope of the invention is not limited in this respect. According to one
5 embodiment, processor 112 may include a baseband processor and Medium Access Control (MAC).

[0024] Processor 112 may couple to a memory 114 which may include volatile memory such as DRAM, non-volatile memory such as flash memory, or alternatively may include other types of storage such as a hard disk drive,
10 although the scope of the invention is not limited in this respect. Some portion or all of memory 114 may be included on the same integrated circuit as processor 112, or alternatively some portion or all of memory 114 may be disposed on an integrated circuit or other medium, for example a hard disk drive, that is external to the integrated circuit of processor 112, although the scope of the invention is
15 not limited in this respect. According to one embodiment, software may be provided in memory 114 to be executed by processor 112 to allow wireless system 116 to perform a variety of functions, which may include one or more functions described below.

[0025] Wireless system 116 may communicate with an access point (AP)
20 128 (or other wireless system) via wireless communication link 134, where access point 128 may include at least one antenna 118. Although not shown in FIG. 1, AP 128 may, for example, include a structure that is similar to wireless system 116, including a wireless transceiver, a processor, a memory, and software provided in memory to allow AP 128 to perform a variety of functions. In an
25 example embodiment, wireless system 116 and AP 128 may be considered to be

stations in a wireless communication system, such as a WLAN system.

[0026] Access point 128 may be coupled to network 130 so that wireless system 116 may communicate with network 130, including devices coupled to network 130, by communicating with access point 128 via wireless communication link 134. Network 130 may include a public network such as a telephone network or the Internet, or alternatively network 130 may include a private network such as an intranet, or a combination of a public and a private network, although the scope of the invention is not limited in this respect.

[0027] Communication between wireless system 116 and access point 128 may be implemented via a wireless local area network (WLAN), for example a network which may be compliant with an Institute of Electrical and Electronics Engineers (IEEE) standard such as IEEE 802.11a, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n and so on, although the scope of the invention is not limited in this respect.

[0028] In another embodiment, communication between wireless system 116 and access point 128 may be implemented via a cellular communication network compliant with a 3GPP standard, although the scope of the invention is not limited in this respect.

[0029] Referring to FIG. 1, AP 128 may include a channel access control to control access to one or more communication channels between AP 128 and one or more wireless systems. In one embodiment, the AP 128, through its channel access control, may allow only one user (or one wireless system) to transmit data over a channel to the AP at a time. As examples, there may be only one channel over communication link 134, or there may be multiple channels over communication link 134 via use of frequency division multiplexing or other

technique.

[0030] The channel access control of AP 128 may control access to the channel by selectively granting users a transmit opportunity (TXOP), for example. According to an embodiment, a TXOP may be a time period during which the
5 wireless system 116 may transmit data to the AP 128 or other station (such as a third party station) over the channel and/or may initiate an exchange of packets with the AP 128 or other station over the channel. This period of time may for the TXOP may be fixed for all TXOPs, or may be adaptively changed by the AP, for example.

10 **[0031]** According to an example embodiment, wireless systems may obtain permission to transmit information during a transmit opportunity (TXOP) in a variety of different ways. According to one embodiment, TXOPs may be granted permission by AP 128 upon request from a wireless system. For example, a wireless system may listen to the medium for a random number of time slots, and
15 if the medium is quiet, the system may send a request to send (RTS) message. The AP (or other station) may reply with a clear to send (CTS) message which may mean that it is likely that no other station has begun transmitting, and the system has obtained the TXOP.

[0032] Alternatively, the user wireless system 116 may schedule one or
20 more TXOPs in advance, such as by requesting TXOPs of a specified duration at requested times or at requested time intervals (e.g., schedule 5ms TXOP, every 100 ms). These are just two examples of how a wireless system may obtain permission to transmit during a TXOP.

[0033] Once a wireless system or station has obtained permission to
25 transmit during a TXOP, the system must determine how to use the time during its

TXOP. There may be several different transmit options or modes of operation that the wireless system may select, although the present invention is not limited to multi-mode systems. These transmit modes may include, for example, a first transmit mode that is designed to improve data throughput, and a second transmit mode that is designed to reduce packet delay for one or more packets. These will be described in more detail below.

According to an example embodiment, data throughput may be improved in some cases when a burst of packets are sent during the TXOP (e.g., filling up the entire TXOP with packets and possibly an acknowledgement). However, in some cases, not all transmitted packets may be successfully received by the destination station (i.e., packet transmission failure). In some cases, a transmitting station may retransmit (or retry) the packets that were not successfully transmitted. Thus, it may be determined whether any retries should be sent in the current TXOP, or sent in one or more subsequent TXOPs.

FIG. 2 is a flow chart illustrating operation of a system according to an example embodiment. At 205, the wireless system may receive permission from the AP or other station to transmit information (or control the channel or initiate a packet exchange) during a TXOP. As noted above, this TXOP may be obtained in a number of different ways.

[0034] At 210, the system may receive or detect a requested service, such as a specified service level, a packet delay request or requirement, a throughput requirement or request, a quality of service (QoS) value or request, or any other service related value. For example, the service request may be set in advance for an application or connection, or may be set in real-time based on a QoS value or other field in a packet. Different applications often have different service needs or

requirements. For example, certain real-time applications, such as streaming video or Voice over IP (VoIP) may require low latency or some maximum latency. While other applications are not as sensitive to latency. Block 210 may be optional in some cases.

5 **[0035]** At 215, according to an embodiment, the wireless system may select one of two transmit modes, although the present invention is not limited to multi-mode systems:

[0036] 1) a first transmit mode to obtain a overall higher data throughput. In an example embodiment, this may be accomplished, by filling the TXOP with a
10 data burst (i.e., one or more packets) without specifically allocating a portion of the TXOP for retries. According to an example embodiment, throughput may be improved by sending as many packets as possible during the TXOP; Or

[0037] 2) a second transmit mode to decrease packet delay for a data burst. According to an example embodiment, this may be accomplished by
15 allocating a first portion of the TXOP for an initial data burst, and specifically allocating a second (or remaining) portion of the TXOP for retries from the initial data burst. Depending on the number of packets to be transmitted and the time for the TXOP, this transmit mode may require stopping or interrupting the data transmission when the first portion of the TXOP expires, even though all packets
20 in the system's transmit queue have not yet been transmitted. This may allow the system, in some cases, to detect acknowledgements for any sent packets, and then send any necessary retries during this same TXOP (during a second portion or remaining portion of the TXOP). Thus, by allocating time in the TXOP to send retries, packet delay for those packets may be decreased.

25 **[0038]** In an example embodiment, a packet or an application may specify,

in block 210, that one-way delay for packets should be less than X ms (e.g., less than 100 ms). According to one embodiment, the system may then determine whether this maximum delay requirement (X ms) is less than a threshold. If this maximum delay requirement is less than a threshold, then the system may select
5 the second transmit mode, where a first portion of time is allocated for a data burst and a second or remaining portion of time of the TXOP is allocated for retries. This may allow packet delay or latency to be decreased. Otherwise, the first transmit mode may be selected, where no time is specifically allocated or reserved for retries.

10 **[0039]** At 220, the wireless system then transmits packets according to the selected transmit mode.

[0040] FIG. 3 is a flow chart illustrating operation of a system according to another example embodiment. At 305, a wireless system receives permission to transmit during a TXOP.

15 **[0041]** At 310, the system may detect or measure one or more criteria (or condition). There are a number of different criteria which may be detected or measured. In an example embodiment, the system may measure or detect the condition of a communication channel which the system would like to access or control.

20 **[0042]** At 315, based on the detected criteria (such as the detected channel condition), the system may allocate a portion of the TXOP. The system may allocate a first portion of the TXOP for an initial data burst (initial transmission of packets which typically may include no retries), and may allocate a second (or remaining) portion of the TXOP for other operations, such as retries for the initial
25 data burst.

[0043] According to an example embodiment, the values for the first portion and the second portion of the TXOP may be adjusted or varied based upon the detected criteria, such as the channel condition. In an example embodiment, a TXOP may be for a set time period. Thus, increasing the time for the first portion
5 of the TXOP (for the data burst) will result in decreasing the time for the second portion of the TXOP (for other operations such as retries). Likewise, if the second portion is increased, then the first portion will typically be decreased, so that the total time (first portion + second portion) is equal to the TXOP.

[0044] At 320, the data or packets are transmitted based upon the
10 allocation for the TXOP. If the first transmit mode has been selected, block 320 may involve transmitting an initial data burst of packets until the expiration of time of the first portion, and then performing other operations (such as retries) during the second portion of the TXOP. If the second transmit mode has been selected, block 320 may involve transmitting all of the data packets available for
15 transmission until the end of the TXOP, for example.

[0045] FIG. 4 is a diagram illustrating several examples of how a channel condition may be detected or measured according to an embodiment. According to an example embodiment, detecting or measuring a channel condition at block 310 (FIG. 3) may be performed according to one or more of the techniques
20 described in FIG. 4. In one embodiment, it may be estimated that a degraded channel condition (lower channel quality) may likely result in more packet transmission failures. Thus, more packet retries are typically required for a lower channel quality or a degraded channel condition. On the other hand, a better channel condition (higher channel quality) may likely result in fewer packet
25 transmission failures, and thus, fewer retries.

[0046] Referring to FIG. 4, at 405, as one example of detecting a channel condition, the system may measure the received signal strength. The received signal strength may be provided as a received signal strength indication (RSSI), for example. A higher RSSI or higher level of received signal may indicate a better channel condition or higher quality channel, according to one embodiment.

[0047] At 410, a system may detect one or more packet failures. This may be performed using well known error detection techniques, such as use of a cyclic redundancy check (CRC). Packet failures may be detected at the transmitting station including by the non-arrival of an expected response (such as an Ack), or at the receiving station (which may then send an Ack or NAK back to the transmitting station).

[0048] At 415, the system may detect or measure a bit error rate (BER), which may be, for example, the ratio of bits which failed transmission divided by the total number of bits attempted transmission, over a period of time. At 420, the system may detect or measure a packet failure rate, which may be, for example, the number of packet failures divided by the total number of packet transmission attempts, over a period of time. An increased number of bit errors or increased number of packet failures may indicate a lower channel quality, and thus indicating, on average, that more retries may be necessary.

[0049] Other conditions or information may also be detected or measured which may provide an indication of or be correlated in some fashion with the likelihood or probability that a packet will fail to be successfully transmitted. Other criteria or information may be used to allocate time for a TXOP, such as the number of packets in the wireless system awaiting transmission, number of users sharing the channel, the total time for this TXOP, etc.

[0050] According to an example embodiment, at block 315 (FIG. 3), as the channel condition improves, the probability of packet transmission failure may typically decrease. In such case, a larger percentage of the TXOP may be allocated for the initial data burst and a smaller percentage of the TXOP allocated
5 for other operations (such as for retries). As an example, an improving channel condition (e.g., lower probability of packet failure) may be detected based on a lower number of bit errors or packet failures, a higher RSSI, etc., some combination of these conditions, or some other measurement or calculation that may be correlated with a lower probability of packet failures.

10 **[0051]** On the other hand, if the channel condition worsens or degrades at 315, this may indicate a higher probability of packet failures. In such case, the system may allocate a larger percentage of the TXOP for the other operations (such as retries). This is because, as the channel condition worsens, it may be more likely that one or more retries may be sent, on average. An increase in time
15 for other operations in the TXOP may better accommodate the expected number of retries. Thus, by specifically allocating time for retries or other operations during the TXOP, packet latency may be reduced.

[0052] FIG. 5 is a diagram illustrating examples of other operations a system may perform according to an embodiment. In 315 of FIG. 3, the system
20 allocates or reserves a second portion of the TXOP for other operations. The allocations of the TXOP may be in terms of time, number of packets, as examples. There may be one or more operations that the wireless system may perform during this second portion of time that has been reserved. Several examples of other operations are illustrated in FIG. 5, although the present invention is not
25 limited in this respect.

[0053] Referring to FIG. 5, at 505, a system may retransmit or retry one or more packets of the initial data burst which were not successfully transmitted to their destination (packet failures). According to an example embodiment, the second portion of time is allocated primarily for retries. However, in the event that
5 retries become unnecessary, then the second portion of time can be used for a variety of other tasks (see, e.g., 510-520 of FIG. 5). In an example embodiment, for some applications, even though a packet failure occurred, a retry for that failed packet may be unnecessary if too much delay has occurred.

[0054] At 510, a system may transmit another data burst of packets during
10 the second portion of the TXOP if, for example, retries of the initial burst are unnecessary. Also, another burst of packets may be sent if very few retries are sent, leaving time left over in the second portion. Retries of the initial data burst may be unnecessary if all of those packets were successfully transmitted to their destination, or if retransmission of one or more failed packets is otherwise
15 unnecessary.

[0055] At 515, the system may release control of the channel back to the channel access control of the AP. Control may be released or passed back to the AP by the system sending a control message to the AP. The AP may then allow another user or station to receive channel access to use the unused portion of this
20 TXOP.

[0056] Block 520 (FIG. 5) will be described with reference to FIG. 6. FIG. 6 is a diagram illustrating allocation of time for a TXOP according to an example embodiment. In FIG. 6, a TXOP is shown including a first portion 605 allocated for an initial data burst, and a second portion 610 allocated or reserved for other
25 operations. Referring to FIGs. 5 and 6, if no retries are sent during the TXOP, at

520, a system may re-allocate the time of the second (or remaining) portion 610 based on one or more updated criteria (e.g., updated channel condition). In an example embodiment, a first sub-portion 615 of second portion 610 may be allocated for a second data burst, while a second sub-portion 620 may be allocated for other operations (such as retries), based upon one or more updated criteria. This process can be repeated for second sub-portion 620. Thus, it can be seen that the process of allocating a TXOP may be repeated for unused portions of the TXOP, based on a current or updated criteria.

[0057] FIG. 7 is a diagram illustrating operation of a system according to another embodiment. Referring to FIG. 7, two stations (or wireless systems) are shown, (STA1, STA2). Station 1 transmits a RTS packet (or protocol data unit) 705, and station 2 responds with a CTS message, thereby gaining a TXOP at station 1. The TXOP is divided by station 1 into a first portion 750 for an initial data burst and a second portion 760 for retries.

[0058] During the first portion 750 of the TXOP in FIG. 7, station 1 transmits an initial burst of packets 715 (typically packets sent for the first time, and with few if any retries). However, packets 720 and 725 in the burst fail during the transmission (are not successfully received by station 2). Station 2 replies with one or more acknowledgements to indicate which packets were successfully received. According to an example embodiment, station 2 responds with a block acknowledgement (Ack) 740, which may include a bit map to selectively acknowledge each packet that was successfully received by station 2. In one embodiment, the block Ack may also indicate which packets failed the CRC check (a NAK). However, the block Ack 740 does not acknowledge packets 720 and 725, because these failed.

[0059] Therefore, during the second portion 760 of the TXOP (reserved for retransmissions or retries), station 1 retransmits failed packets 720 and 725 as packets 730 and 735, respectively. The receipt of these packets is then acknowledged by station 2 through block Ack 745.

5 **[0060]** According to an example embodiment, the success or failure of the transmission of a packet may be represented using a probability distribution, such as a Binomial distribution, a Poisson distribution, a Raleigh distribution, and the like. Each packet transmission attempt will typically have two possible outcomes: 1) success (packet successfully transmitted); or 2) failure. Thus, according to an
10 example embodiment, a Binomial distribution may advantageously be used to represent the probability of packet transmission success or failure, although the present invention is not limited in this respect.

[0061] FIG. 8 is a diagram illustrating a Binomial distribution according to an example embodiment. FIG. 8 illustrates a Binomial distribution for a number of
15 packet failures for a burst length (N) up to 16, and a probability of individual packet failure (p) equal to 10%. This provides an indication of the probability of the number of failed transmissions for a burst length of 16.

[0062] FIG. 9 is a cumulative distribution function (CDF) based upon the Binomial distribution of FIG. 8. The CDF may be obtained by integrating or
20 summing the Binomial distribution of FIG. 8, for example. The CDF of FIG. 9 may be interpreted as indicating the expected maximum number of packet failures (and thus, the expected maximum number of retries) that are likely to occur for a confidence level ranging from zero to 1. In this example (FIG.9), it is assumed that the initial data burst may include 16 packets and that the probability (p) of
25 individual packet failure is 10%. FIG. 9 identifies the expected maximum number

of packet failures and retries for a data burst of 16 packets for a probability of error (p) equal to 10% for a range of confidence levels. For example, as shown in FIG. 9, for the 16 packet data burst at $p=0.1$, there is a 90% confidence level that there will be three or fewer packet failures.

5 **[0063]** Thus, while any particular data burst of 16 packets could have more than three packet failures, for a large number of data bursts, approximately 90% of these data bursts should have three or fewer packet failures. In such a case, a second (or remaining) portion of the TXOP can be reserved (for retries) in the TXOP that is sufficient to allow retransmission of three (retry) packets. This
10 should allow retries to be performed in the same TXOP for 90% of the data bursts, assuming a data burst size of 16 packets, and a probability of packet failure=10%. In this example embodiment, it is assumed that each failed packet will be retransmitted (retried), although in general this may not be the case.

15 **[0064]** FIG. 9 illustrates the cumulative distribution function for just a single case, for burst size of 16 packets, and a probability of packet failure equal to 10%. This information can be calculated for a range of N (initial data burst size) and p (probability of packet failure). FIG. 10 is a diagram illustrating a maximum number of packet failures or retries that will occur on average at a confidence level, for a range of data burst sizes (N) and for a range of probabilities of packet failure.

20 **[0065]** In FIG. 10, a confidence level of 90% has been chosen as an example. In FIG. 10, for a specific data burst size, there should be an increasing number of packet failures on average as the probability of packet failure increases. For example, in FIG. 10, for a data burst size of eight packets, there will be: two or less retries (packet failures) for $p=10\%$; four or less retries at
25 $p=30\%$; six or less retries at a $p=50\%$; and eight or less retries at $p=80\%$ or

higher, where p is the probability of packet failure. This example has assumed that each failed packet will be retransmitted (or retried).

[0066] FIG. 11 is a flow chart illustrating operation of a system according to yet another example embodiment. At 1105, a wireless system may obtain
5 permission to transmit information during a TXOP.

[0067] At 1110, the wireless system may calculate a (current or updated) probability of packet failure. This may be calculated, for example, based on the observed packet failures. For instance, the probability of packet failure may be calculated as:

10
$$(\text{No. of Packet failures}) / (\text{No. of Packet transmission attempts}).$$

[0068] Two different counters may be used, for example, including a transmit counter (for the denominator) and a failure counter (for the numerator), although the present invention is not limited in this respect. The number of failures may be determined based upon the acknowledgements received for
15 transmitted packets and/or the negative acknowledgements received (if used). Any packet that is transmitted and the transmitting station does not receive back an Ack within a predetermined time period may be considered a packet failure, as an example. The probability of packet failure may be calculated as a moving average, an average over a fixed observation period, etc. A filter or other
20 technique may be used to adjust the time period over which the average will be calculated to ensure it is responsive so as to represent a current error rate, but not too responsive to provide a value impacted by short term noise.

[0069] At 1115 of FIG. 11, the wireless system may then calculate an expected maximum number of packet retries based upon the calculated
25 probability of packet failure and a probability distribution. In one embodiment, the

wireless system may calculate an expected maximum number of packet retries based upon a cumulative distribution function (CDF) representing an upper bound on an expected number of retries for the calculated probability of packet failure (P fail), for a range of initial data burst sizes (N burst), for a given confidence level.

- 5 **[0070]** This may be performed, for example, by identifying a maximum number of packet retries in the cumulative distribution functions of FIG. 10 for the calculated probability of packet failure (P fail), for a range of initial data burst sizes (N burst). According to an example embodiment, the range of initial data burst sizes (N) may be examined from one packet up to the maximum number of
- 10 packets which may be transmitted during the TXOP. Allocating a portion of the TXOP to account for this expected maximum number of retries may allow, for example, a data burst to be transmitted along with its retries within the same TXOP for 90% of the initial data bursts.

- 15 **[0071]** According to an example embodiment, the maximum number of retries(or time for retries) may advantageously be calculated based on the CDF of FIG. 10 for the given probability of packet failure, and for which the following inequality is satisfied:

$$T(N_{burst}) + T(N_{retry}) \leq TXOP \text{ size.}$$

- 20 **[0072]** Where:
- TXOP is the duration or size of the TXOP;
- Nburst is the number of packets in the initial data burst (first tries);
- Nretry is the number of packet retries (in the retry burst);
- T(N) is the time taken to transmit N number of packets;
- However, the present invention is not limited in this respect.

- 25 **[0073]** At 1120, an upper bound is calculated for the number of packets for

the initial data burst based upon the calculated maximum number of packet retries and the TXOP size (or duration). In an example, the TXOP size may be 16 packets (i.e., the duration of the TXOP will allow up to 16 data packets to be transmitted), and the CDF of FIG. 10 indicates an expected maximum of three
5 retries for 16 data packets, at a confidence level of 90% and a probability of packet failure of 10%. Therefore, in this example, a portion of the TXOP may be reserved for three packet retries, thus allowing time for 13 packets in the initial data burst (13 packets being the upper bound for the initial burst for this TXOP). Thus, in an example embodiment, the wireless system may determine a maximum
10 initial data burst size for which both the initial data burst and the expected retries for such data burst will fit in the TXOP, on average.

[0074] At 1125, the wireless system then transmits the initial data burst up to the upper bound for the initial data burst. The transmission of data packets may stop before this upper bound is met if the system exhausts its supply of data
15 packets waiting to be transmitted prior to the upper bound. In any event, the system will stop or interrupt the transmission of the initial data burst of packets on or before the upper bound, and then transmit any retries, if necessary. This may involve determining which packets failed, and then retrying these failed packets during the reserved retry portion of the TXOP.

20 **[0075]** While certain features of the embodiments of the invention have been illustrated as described herein, many modifications, substitutions, changes and equivalents will now occur to those skilled in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the embodiments of the invention.

WHAT IS CLAIMED IS:

1. A wireless system comprising:
a memory;
5 a processor coupled to the memory, the processor to allocate a first portion of a transmit opportunity for an initial data burst and to allocate a second portion of the transmit opportunity for other operations including retries.
2. The wireless system of claim 1 wherein the wireless system allocates the
10 second portion of the transmit opportunity to retry any failed packets of the initial data burst, if necessary.
3. The wireless system of claim 1 wherein the other operations are one or more selected from the group comprising:
15 retry one or more packets in the initial data burst that failed, if any packets failed;
transmit another initial data burst of packets if there is sufficient time in the transmit opportunity;
release control of a channel back to a channel access controller; and
20 reallocate a first sub-portion of the second portion for a second initial data burst and a remainder of the second portion for other operations.

4. The wireless system of claim 1 wherein the wireless system is adapted to allocate the first portion and the second portion based upon one or more detected criteria.

5 5. The wireless system of claim 1 wherein the wireless system is adapted to allocate the first portion and the second portion based upon a detected channel condition.

6. The wireless system of claim 5 wherein the detected channel condition is
10 selected from the group comprising:
 received signal strength;
 detected packet errors or failures;
 received bit error rate;
 measured packet failure; and
15 other indicia of the probability of packet failure.

7. The wireless system of claim 1 wherein the wireless system is adapted to further to calculate an upper bound for the initial data burst, and the wireless system to transmit packets of the initial data burst up to the upper bound.
20

8. The wireless system of claim 7 wherein the wireless system is further adapted to interrupt or stop the transmission of packets of the initial data burst when the upper bound is met, and then transmit any retries, if necessary, within the same transmit opportunity.

25

9. The wireless system of claim 1, wherein the wireless system further comprises an antenna, a transceiver coupled to the antenna and to the processor.

5 10. A wireless system comprising:

 a memory; and

 a processor, the processor to estimate a number of packet retries for
a data burst based upon one or more detected criteria, the wireless system
to reserve a portion of a transmit opportunity for the estimated retries and
10 then to transmit the data burst and any necessary retries within the same
transmit opportunity.

11. The wireless system of claim 10 wherein the wireless system further
comprises:

15 a transceiver coupled to the processor; and
 an antenna coupled to the transceiver.

12. The wireless system of claim 10 wherein the processor to estimate the
number of packet retries based upon one or more of a measured probability of
20 packet error and a probability distribution.

13. A wireless system comprising:
an antenna;
a transceiver coupled to the antenna;
25 a processor coupled to the transceiver;

flash memory coupled to the processor, the wireless system to allocate a first portion of a transmit opportunity for an initial data burst and to allocate a second portion of the transmit opportunity for other operations including retries.

5 14. The wireless system of claim 13 wherein the wireless system allocates the second portion of the transmit opportunity to retry any failed packets of the initial data burst, if necessary, wherein the initial data burst and the retries are transmitted in the same transmit opportunity.

10 15. A wireless system comprising:
a processor, the processor adapted to calculate a probability of packet failure, to calculate an expected maximum number of retries based on the calculated probability of packet failure and a probability distribution, and to reserve a portion of a transmit opportunity for retries based upon the expected number of
15 retries.

 16. The wireless system of claim 15 wherein the processor to calculate an upper bound for the initial data burst based upon the expected maximum number of retries and the size of the transmit opportunity.

20

 17. The wireless system of claim 15 wherein the probability distribution comprises a Binomial distribution.

 18. A method comprising:
25 receiving permission to transmit information during a transmit opportunity;

allocating a first portion of the transmit opportunity for an initial data burst ;
allocating a second portion of the transmit opportunity for other operations
including retries.

5 19. The method of claim 18 wherein the allocating the first and second
portions being based upon a detected criteria.

20. The method of claim 18 wherein the allocating of the first and second
portions being based upon a detected channel condition.

10

21. The method of claim 20 wherein the channel condition is selected from
the group comprising:

received signal strength;

detected packet errors or failures;

15 received bit error rate;

measured packet failure; and

other indicia of the probability of packet failure.

22. The method of claim 18 wherein the other operations are one or more
20 selected from the group comprising:

wherein the other operations comprise one or more of the following:

retrying one or more packets in the initial data burst that failed, if any
packets failed;

transmitting another initial data burst of packets, if retries are unnecessary,
25 or if there is sufficient time in the transmit opportunity after transmitting any retries;

releasing control of a channel back to a channel access controller; and
reallocating a first sub-portion of the second portion for a second initial data burst and a remainder of the second portion for other operations.

5 23. The method of claim 18 wherein the allocating is performed based upon a detected criteria, the method comprising:

calculating an upper bound for the initial data burst, defining a maximum size for the first portion; and

transmitting packets of the initial data burst up to the upper bound;

10 interrupting or stopping the transmission of the initial data burst;

transmitting any retries of the initial data burst, the initial data burst and the retries for the data burst being transmitted in the same transmit opportunity.

24. The method of claim 18 wherein the receiving permission to transmit
15 information during a transmit opportunity comprises at least one of:

requesting permission to transmit data over a channel; and

receiving permission to transmit data over the channel.

25. The method of claim 18 wherein the receiving permission to transmit
20 information during a transmit opportunity comprises requesting and receiving permission to transmit during a scheduled transmit opportunity.

26. A method of allocating time during a transmit opportunity, the method comprising:

25 receiving permission to transmit information during a transmit opportunity;

allocating a first portion of the transmit opportunity for an initial data burst based upon a detected channel condition;

allocating a remaining portion of the transmit opportunity for other operations, the other operations to be determined based upon the success or
5 failure of the transmission of packets in the initial data burst.

27. The method of claim 26 wherein the other operations include one or
10 more selected from the group comprising:

retrying one or more packets in the initial data burst that failed, if any packets failed;

transmitting another initial data burst of packets, if retries are unnecessary, or if there is sufficient time in the transmit opportunity after transmitting any retries;

15 releasing control of a channel back to a channel access controller; and

reallocating a first sub-portion of the second portion for a second initial data burst and a remainder of the second portion for other operations.

28. A method of allocating time during a transmit opportunity comprising:
20 detecting a channel quality or other criteria; and
reserving a portion of a transmit opportunity for expected retries based upon the detected channel quality or other criteria.

29. The method of claim 28 wherein the detecting is selected from the
25 group comprising:

detecting a bit error rate;
detecting packet failure or a packet failure rate;
detecting packet retries;
detecting a signal-to-noise ratio;
5 detecting a received signal strength.

30. A method comprising:

receiving permission to transmit information during a transmit opportunity;
detecting a criteria;

10 selecting one of the following transmit modes based upon the detected
criteria:

a) allocating a first portion of the transmit opportunity for an initial
data burst and a second portion of the transmit opportunity for retries;

b) not allocating a specific portion of the transmit opportunity for
15 retries; and

transmitting packets according to the selected transmit mode.

31. The method of claim 30 wherein the criteria comprises a Quality of
Service (QoS) field or QoS value or other value.

20

32. The method of claim 30 wherein transmit mode a) relies upon one or
more subsequent transmit opportunities or channel accesses to transmit one or
more retries associated with the initial data burst.

25 33. An article comprising:

a storage medium;

said storage medium including stored thereon instructions that, when executed by a processor, result in:

receiving permission to transmit information during a transmit opportunity;

5 detecting a criteria;

allocating a first portion of the transmit opportunity for an initial data burst and a second portion of the transmit opportunity for other operations including retries based upon the detected criteria.

10 34. The article of claim 33 wherein the instructions resulting in detecting a criteria comprise detecting a channel condition.

35. A method comprising:

receiving permission to transmit information during a transmit opportunity;

15 detecting one or more criteria; and

selecting one of the following transmit modes based upon the detected criteria:

a) a transmit mode in which packets are transmitted so as to decrease latency for at least some of the packets; and

20 b) a transmit mode in which packets are transmitted so as to increase data throughput.

36. The method of claim 35 wherein the criteria comprises a Quality of Service (QoS) field or QoS value or other value.

25

37. The method of claim 35 wherein transmit mode a) comprises reserving a specific portion of a transmit opportunity for retries, and transmit mode b) comprises transmitting as many packets as possible during the transmit opportunity without specifically reserving a portion of the transmit opportunity for
5 retries.

1/11

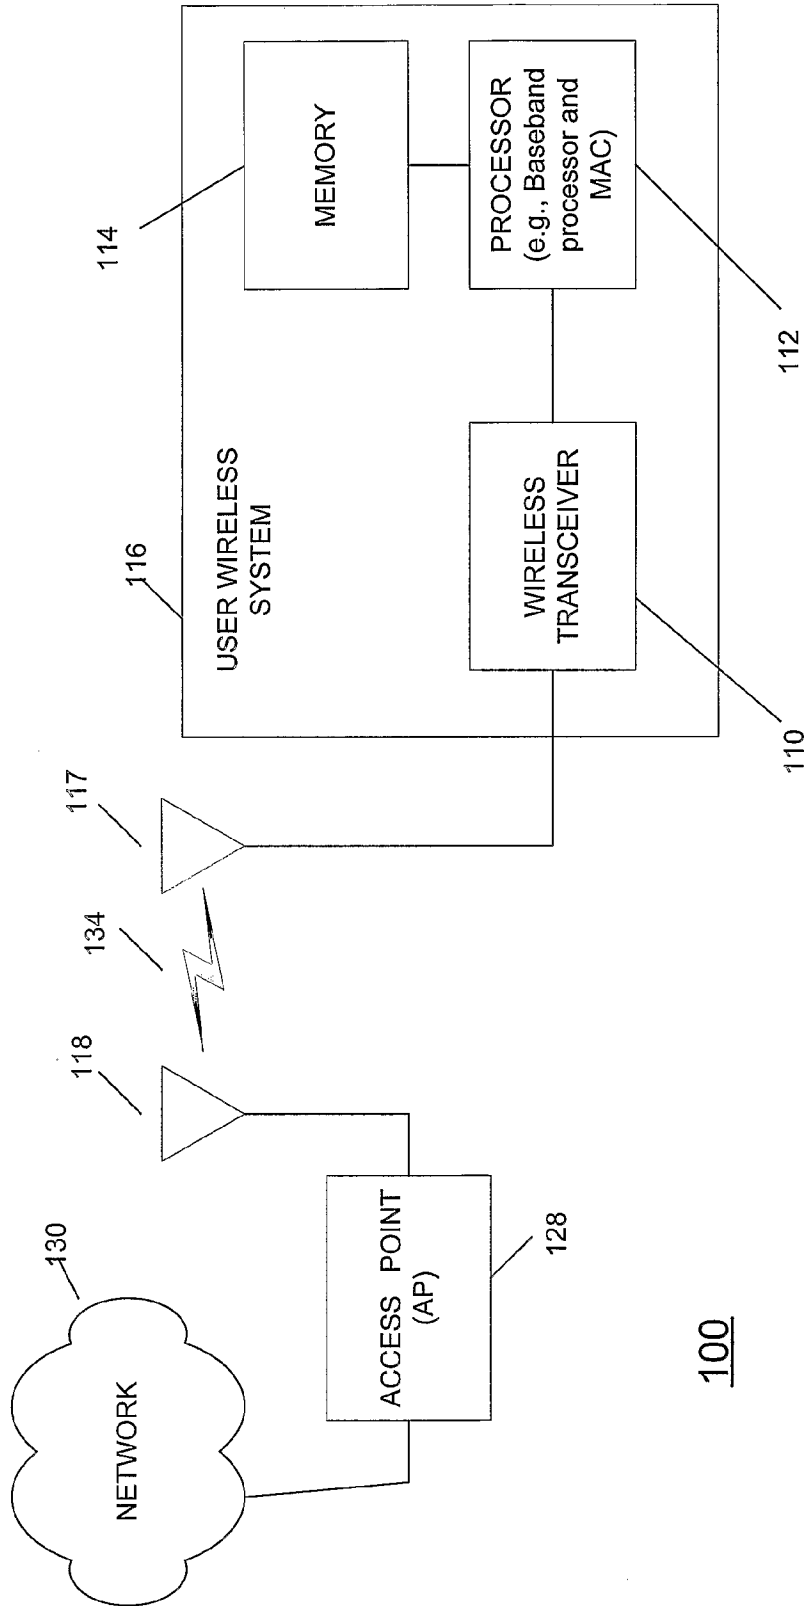


FIG. 1

2/11

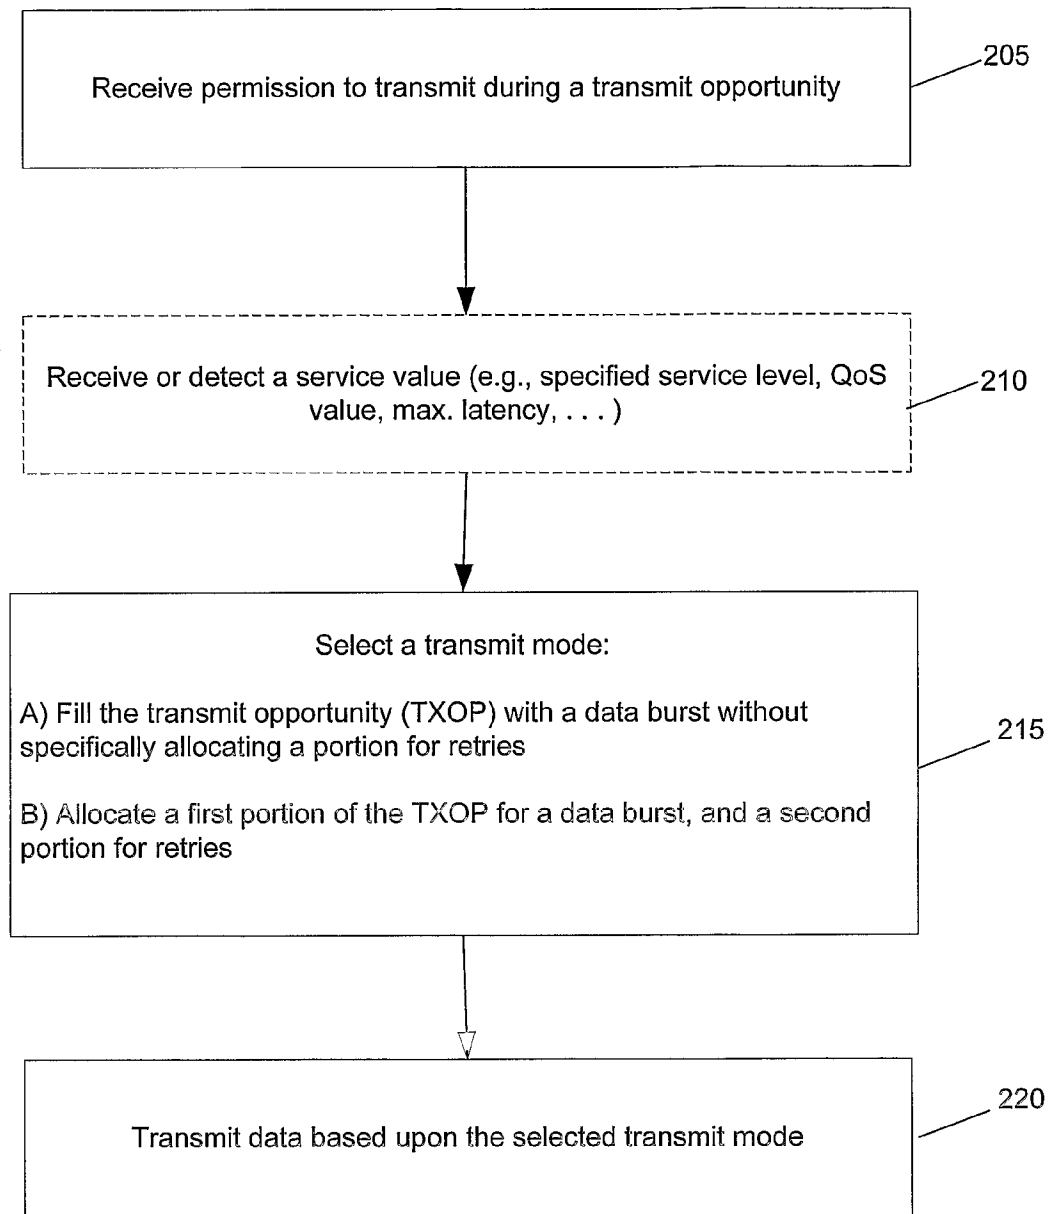


FIG. 2

3/11

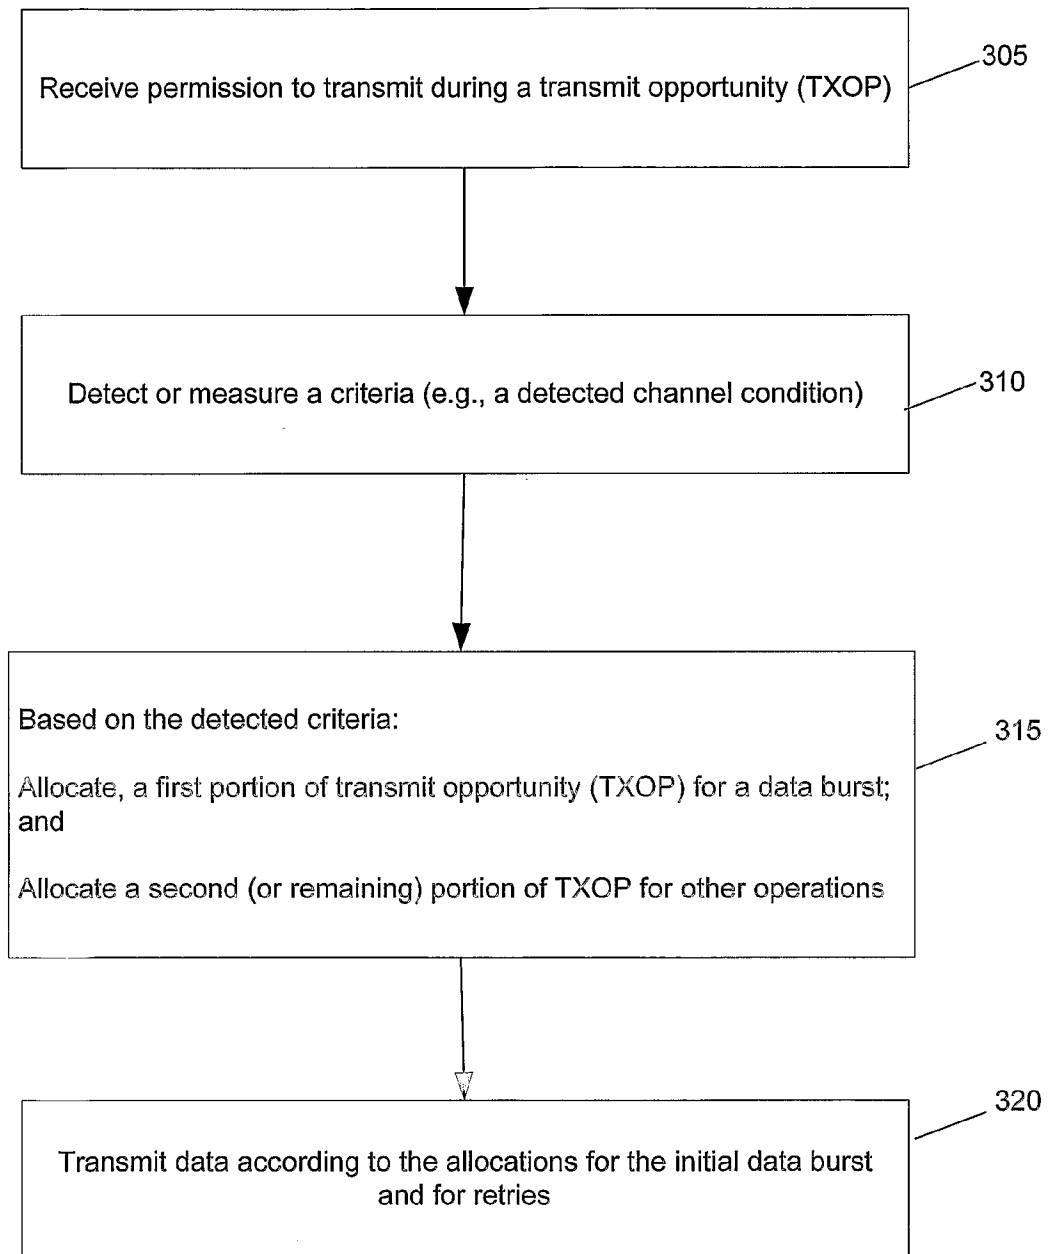
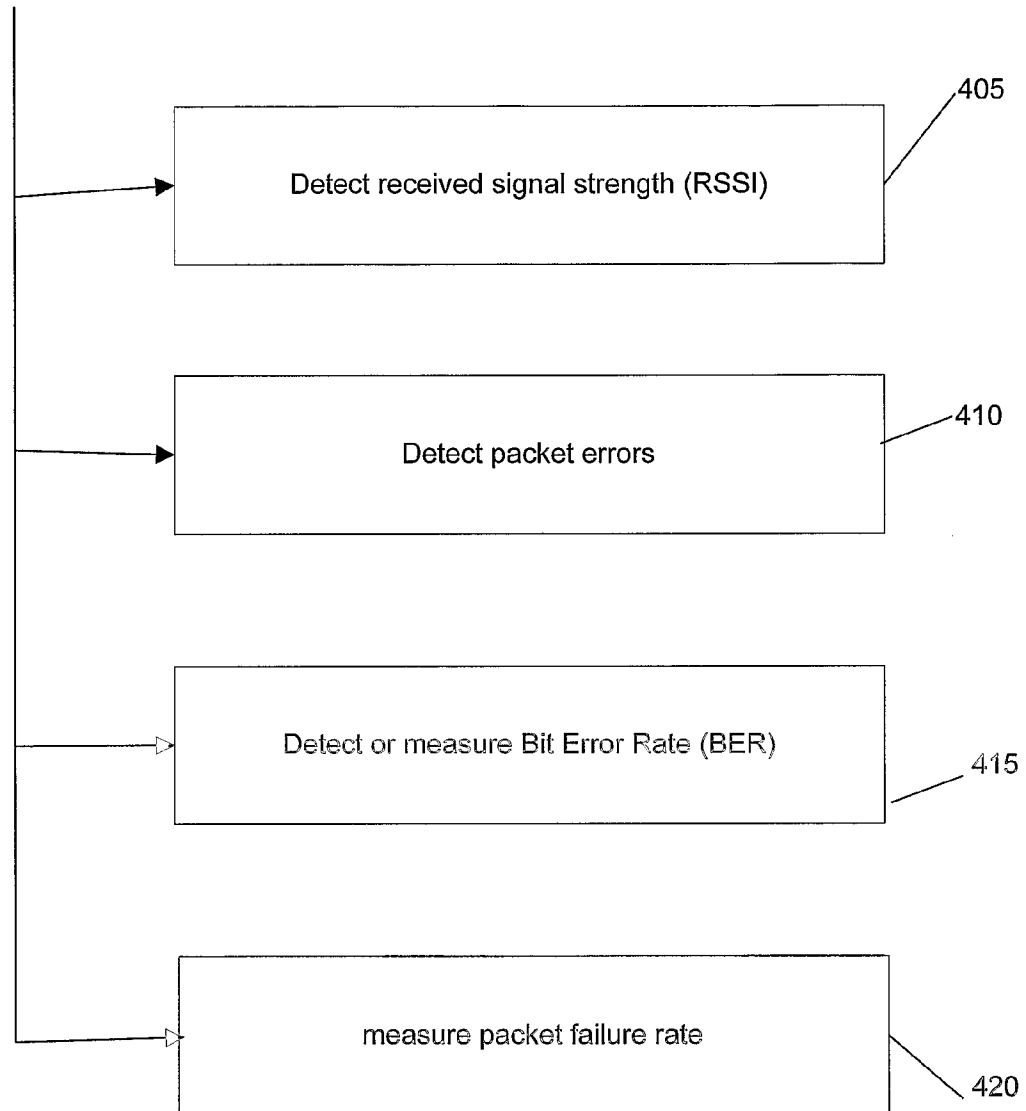


FIG. 3

4/11

Example detected channel
conditions or other criteria:

**FIG. 4**

5/11

Examples of other operations:

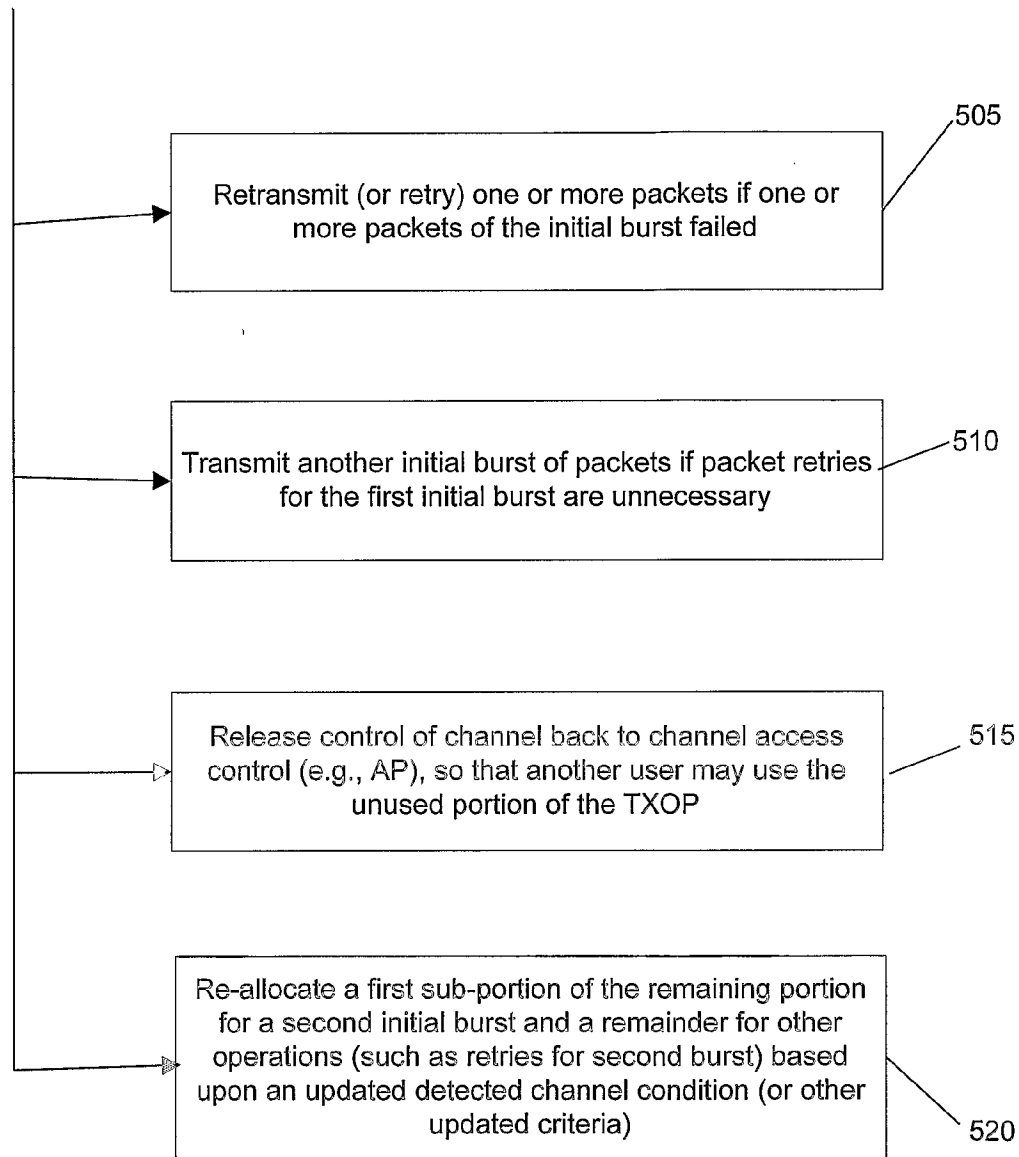


FIG. 5

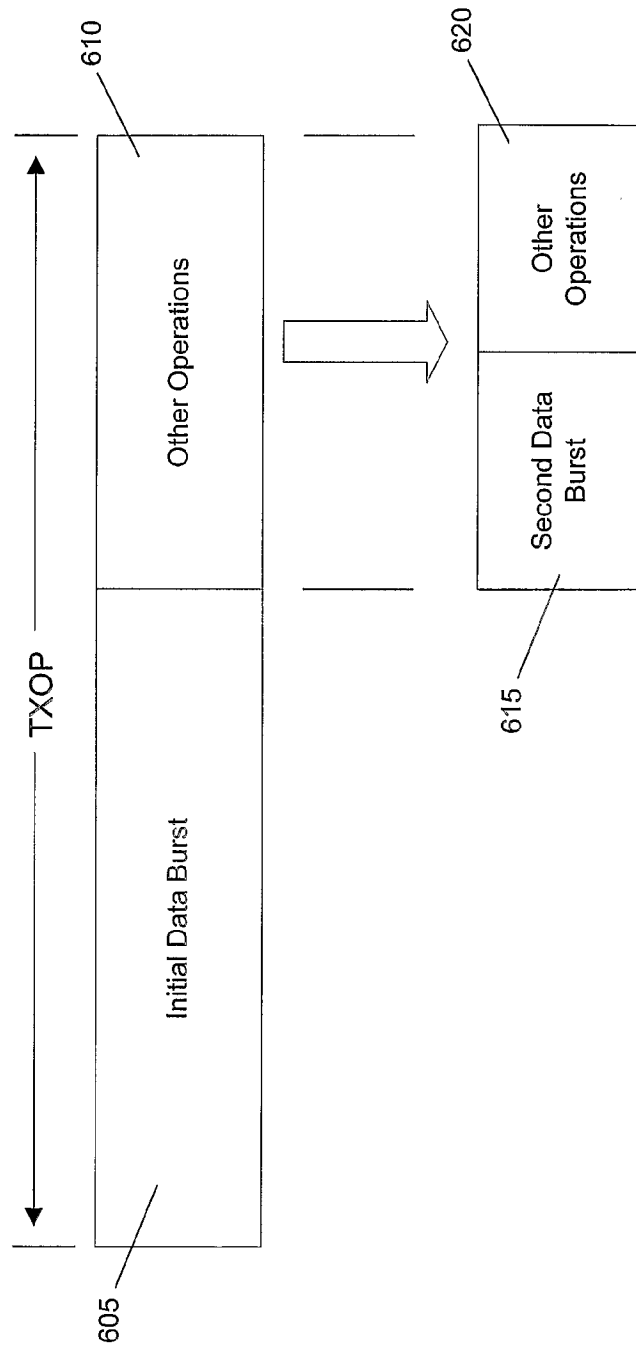


FIG. 6

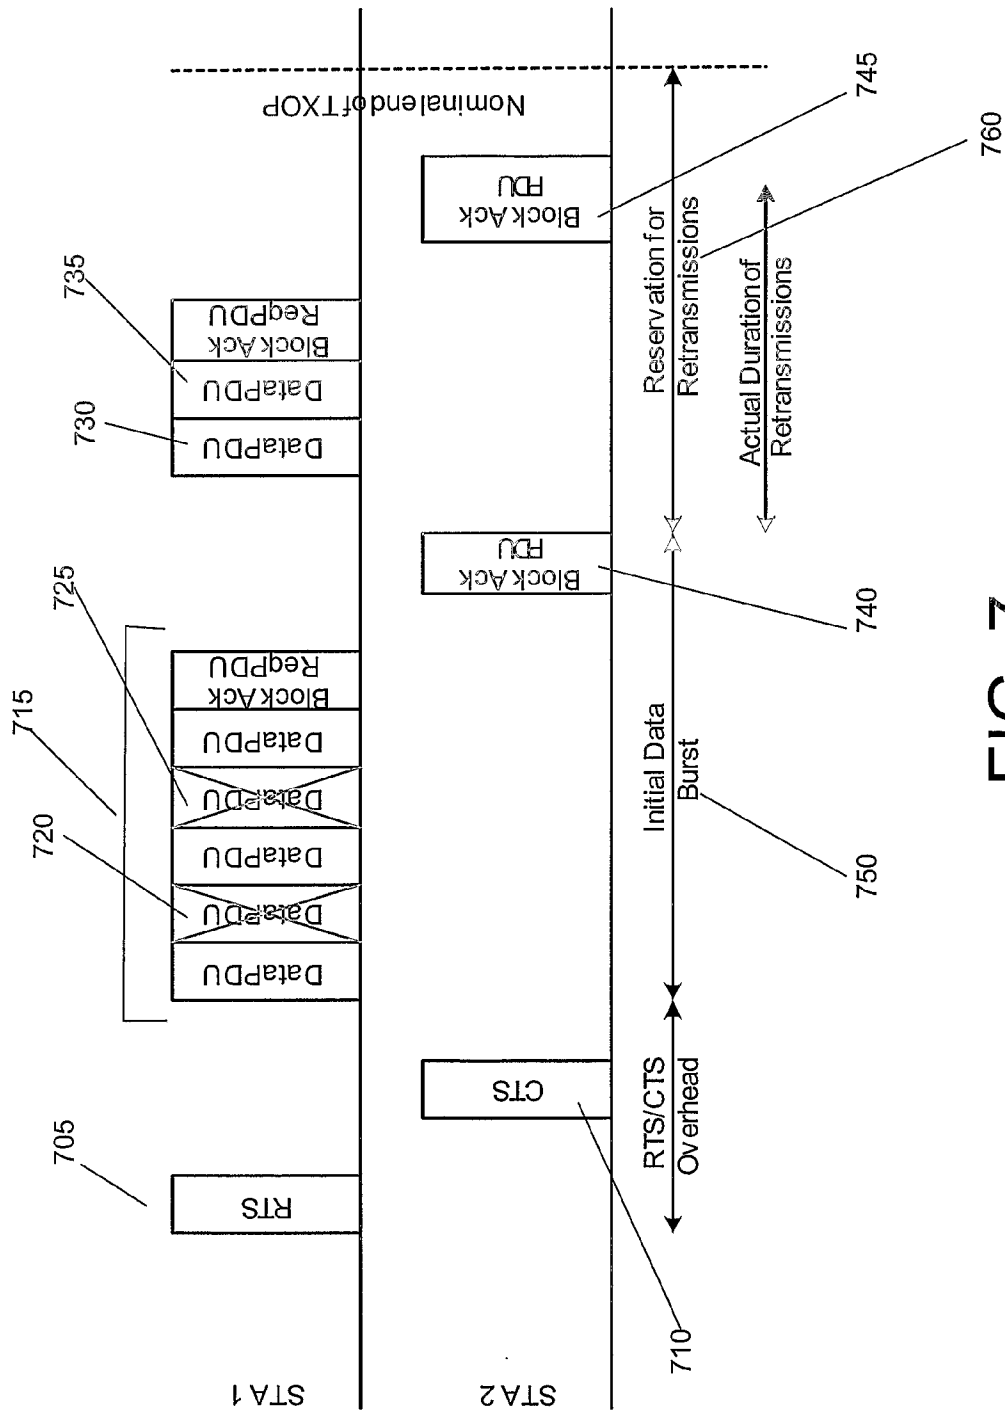


FIG. 7

8/11

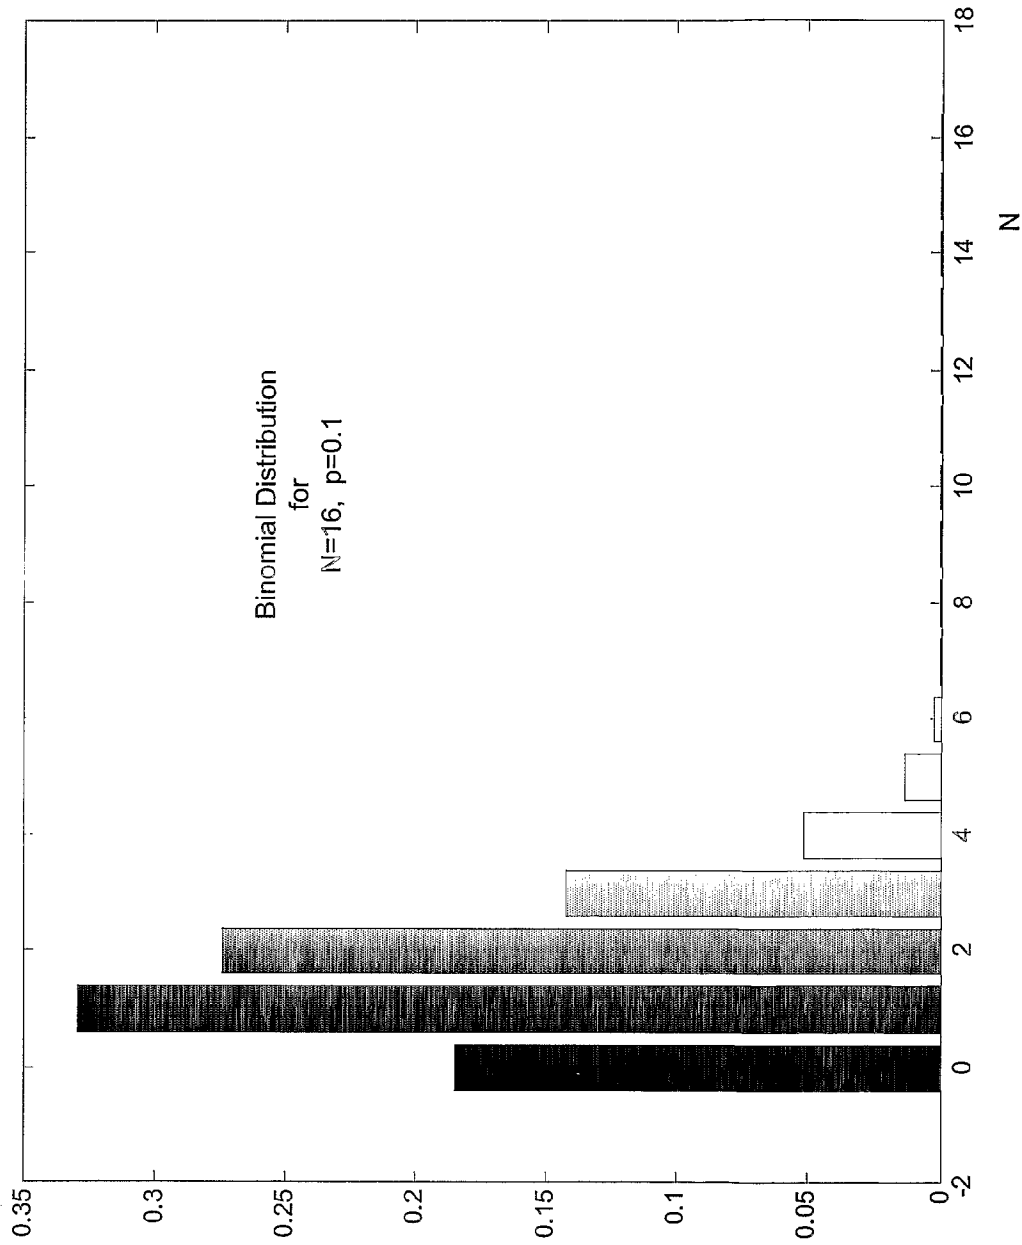


FIG. 8

9/11

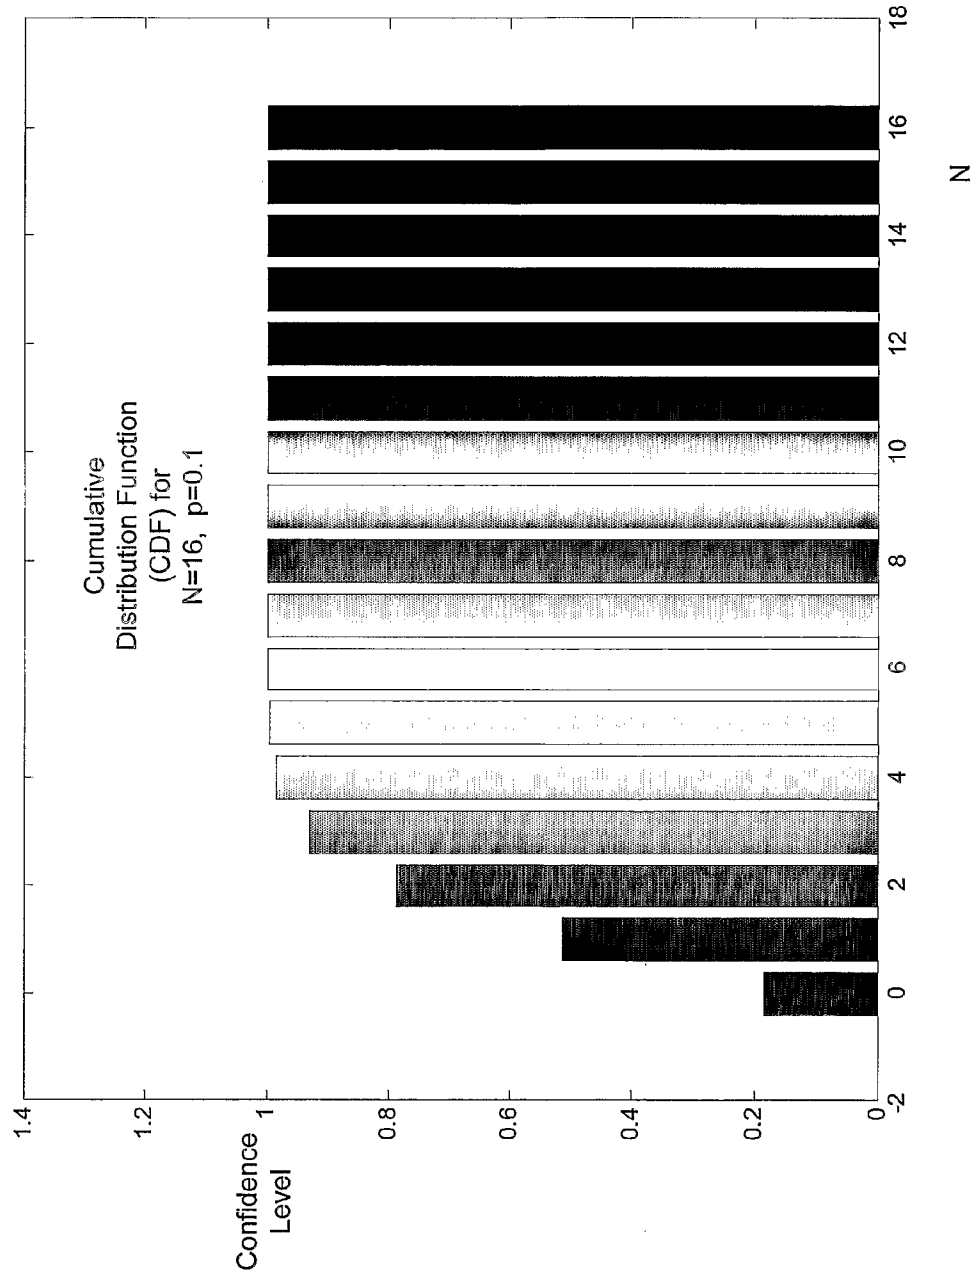


FIG. 9

10/11

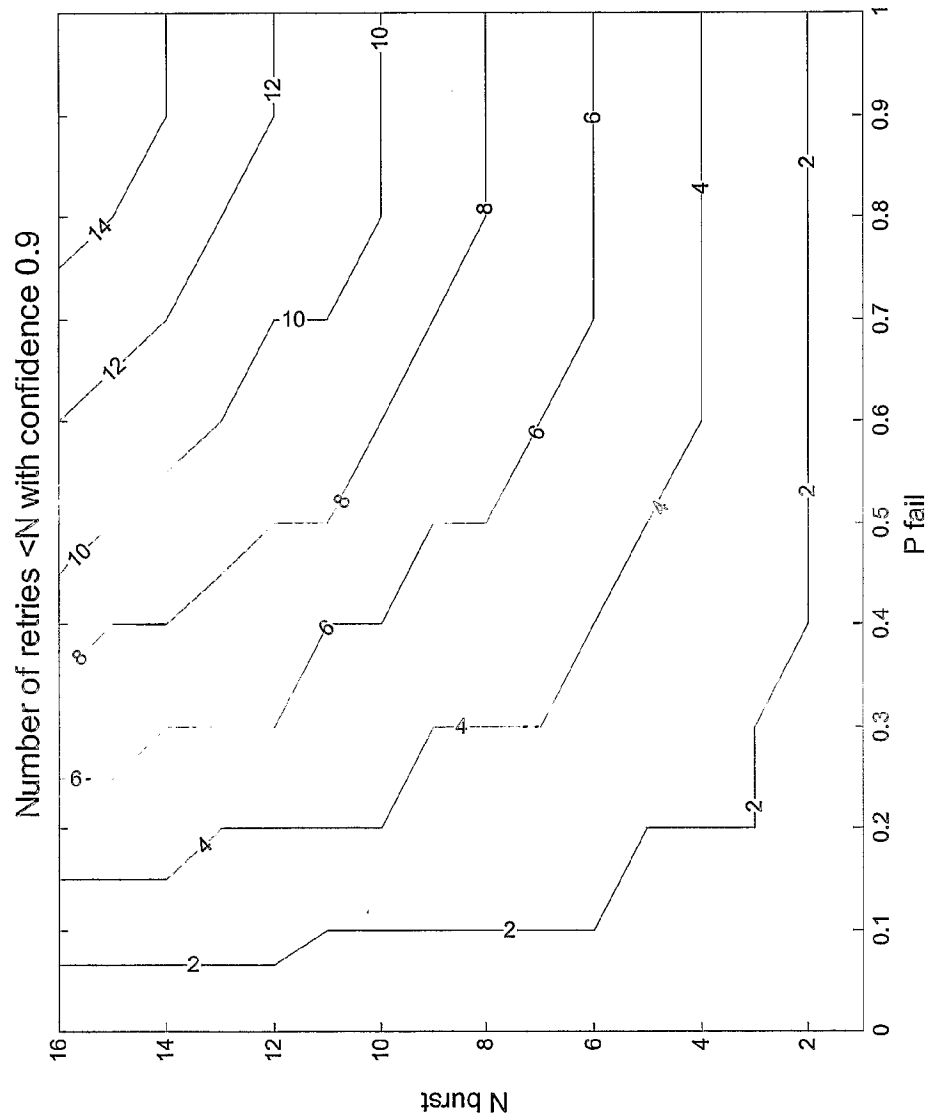


FIG. 10

11/11

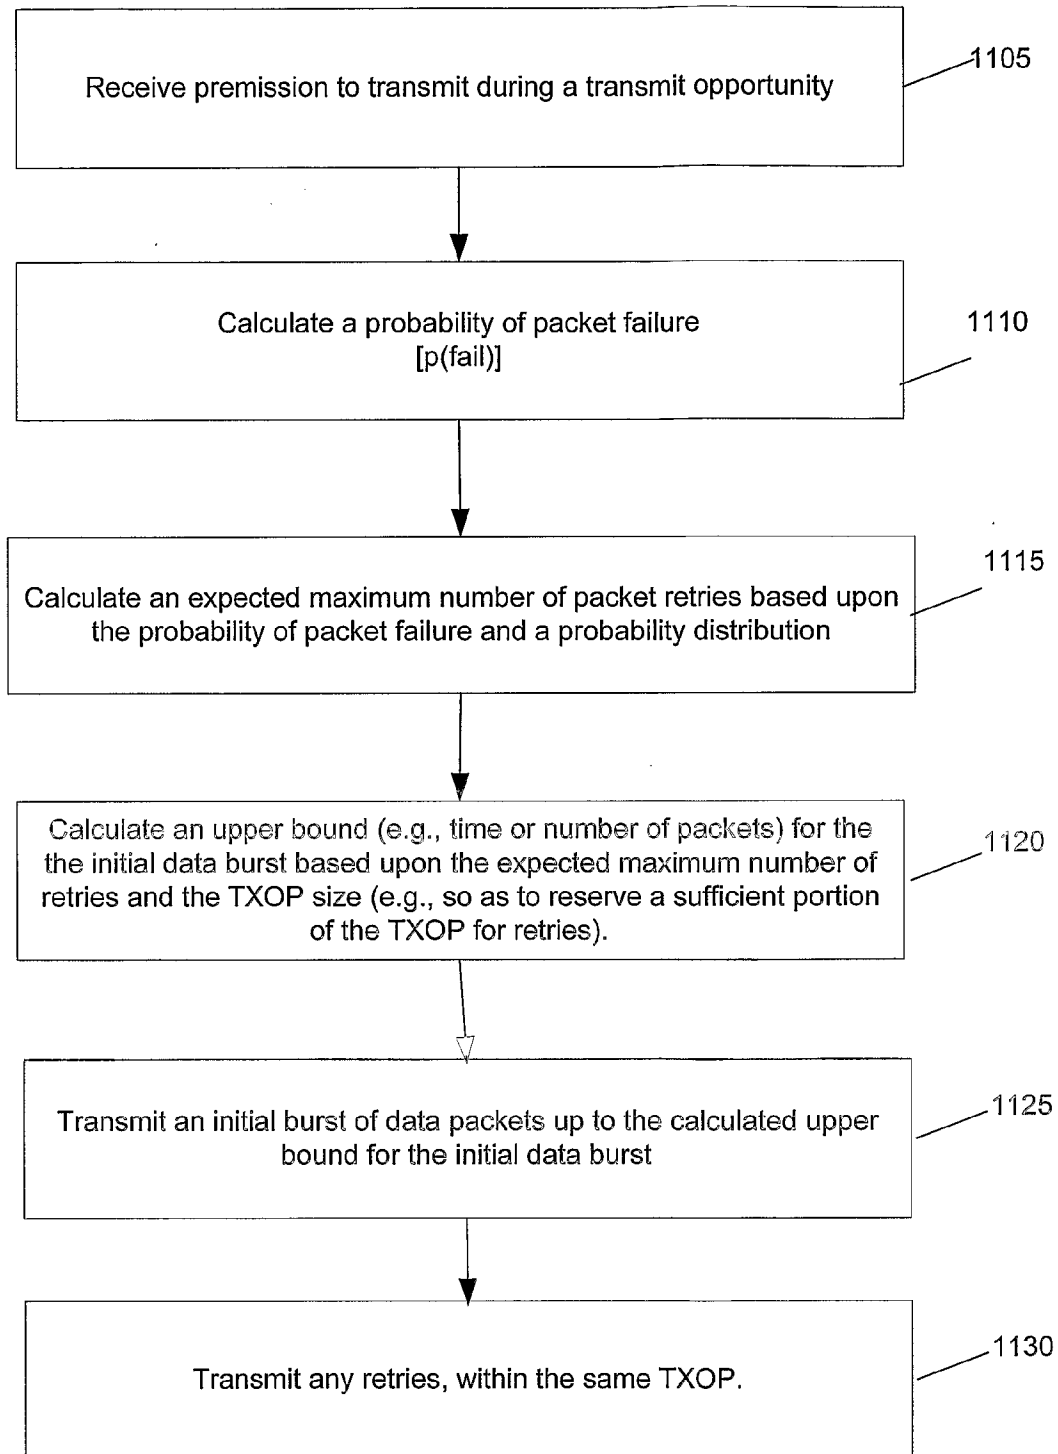


FIG. 11

INTERNATIONAL SEARCH REPORT

US2004/018264

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04L12/56 H04L12/28 H04L1/18 H04Q7/22 H04L29/08

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04L H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 6 574 668 B1 (GUBBI RAJUGOPAL R ET AL) 3 June 2003 (2003-06-03) abstract column 2, line 10 - line 22 column 4, line 34 - column 5, line 17 -----	1,10,13, 15 2-9,11, 12,14, 16-37
X A	EP 1 133 094 A (SCHMIDL, TIMOTHY M) 12 September 2001 (2001-09-12) abstract paragraph '0022! - paragraph '0023! paragraph '0026! ----- -/--	18,26, 28,30,33 1-17, 19-25, 27,29, 31,32, 34-37



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

16 November 2004

Date of mailing of the international search report

25/11/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Harrysson, A

INTERNATIONAL SEARCH REPORT

'US2004/018264

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	US 6 404 756 B1 (DEMPSEY TIM ET AL) 11 June 2002 (2002-06-11) abstract column 1, line 25 - line 50 sentence 4, paragraph 17 - paragraph 27 -----	18,26, 28,30,33 1-17, 19-25, 27,29, 31,32, 34-37
A	EP 0 595 637 A (MALKAMÄKI ESA, RANTA PEKKA) 4 May 1994 (1994-05-04) abstract column 8, line 49 - column 9, line 18 -----	1-37
A	WO 98/46026 A (WINROTH MATS OLOF ; TELIA AB (SE)) 15 October 1998 (1998-10-15) abstract page 7, line 7 - line 13 -----	1-37
A	EP 1 161 022 A (ERICSSON TELEFON AB L M) 5 December 2001 (2001-12-05) abstract paragraph '0039! -----	1-37

INTERNATIONAL SEARCH REPORT

Information on patent family members

US2004/018264

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6574668	B1	03-06-2003	AU 2954401 A EP 1269675 A1 WO 0156219 A1	07-08-2001 02-01-2003 02-08-2001
EP 1133094	A	12-09-2001	EP 1133094 A2 JP 2001285315 A	12-09-2001 12-10-2001
US 6404756	B1	11-06-2002	AU 1583701 A CA 2390529 A1 EP 1228603 A2 JP 2003513591 T WO 0133770 A2	14-05-2001 10-05-2001 07-08-2002 08-04-2003 10-05-2001
EP 0595637	A	04-05-1994	FI 92125 B DE 69325430 D1 DE 69325430 T2 EP 0595637 A1 JP 3450391 B2 JP 6284114 A US 5563895 A	15-06-1994 29-07-1999 23-12-1999 04-05-1994 22-09-2003 07-10-1994 08-10-1996
WO 9846026	A	15-10-1998	SE 514017 C2 DE 69809406 D1 DE 69809406 T2 DK 974231 T3 EE 9900463 A EP 0974231 A1 JP 2002511205 T NO 994780 A SE 9701273 A WO 9846026 A1	11-12-2000 19-12-2002 25-09-2003 10-03-2003 15-06-2000 26-01-2000 09-04-2002 07-12-1999 09-10-1998 15-10-1998
EP 1161022	A	05-12-2001	EP 1161022 A1 AU 6746101 A WO 0191360 A1 EP 1295427 A1 US 2003191844 A1	05-12-2001 03-12-2001 29-11-2001 26-03-2003 09-10-2003